







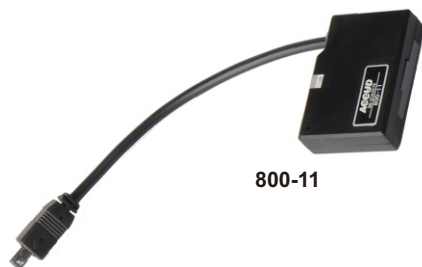

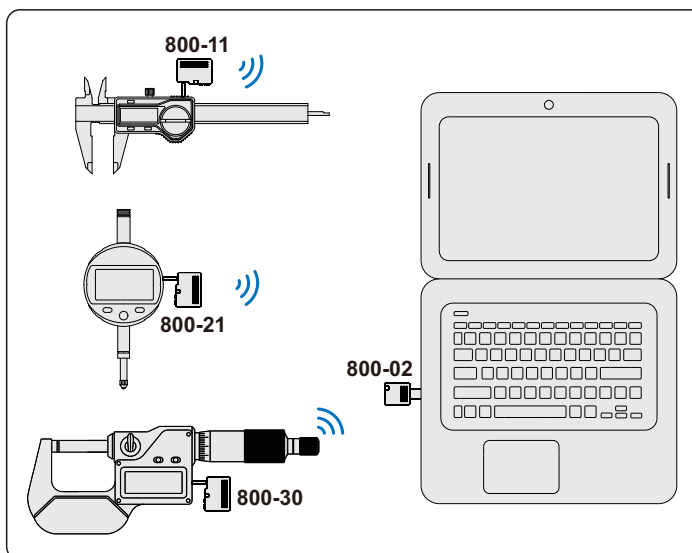


**VIDEO**

**800-11**










**800-02**

- ◆ Max. transmission distance: 15m
- ◆ For single channel receiver (code: 800-01), it can be only connected to one receiver(gages). There is no software, the data can be transferred into Excel, Word directly.
- ◆ For multi- channel receiver(code: 800-02) , it can be connected to Max. 10 receivers(gages). It includes a software, the data can be transferred into the software.
- ◆ Wireless zigbee protocol, conforming to IEEE802, 2.4GHz band



Code	Name	Plug to product	Products
<b>800-01</b>	single channel receiver		for follow measuring tools
<b>800-02</b>	multi- channel receiver		for follow measuring tools
<b>800-10</b>	transmitter		for digital calipers with following electronics  
<b>800-10L</b>	transmitter		for digital height gage with following electronics 
<b>800-11</b>	transmitter		for digital calipers with following electronics  

\* Confirm the electronics output port type when placing orders

Code	Name	Plug to product	Products
<b>800-15</b>	transmitter		for digital calipers and height gage with following electronics  
<b>800-21</b>	transmitter		for digital indicators with following electronics 
<b>800-20</b>	transmitter		for digital indicators with following electronics   
<b>800-30</b>	transmitter		for digital micrometers with data output with following electronics 