

# 229

## DIAL INDICATOR




- ◆ Graduation: 0.01mm
- ◆ With limit hands
- ◆ Rang per revolution: 1mm
- ◆ Supplied with lug and flat back



Styli(optional)



Application

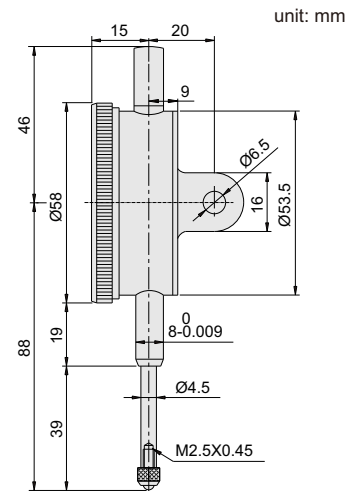

Code	Range	Accuracy	Hysteresis	Scale
229-025-11	25mm	35µm	7µm	0-100

With manufacturer inspection certificate

AECUD

