




- ◆ With analog reading
- ◆ Button: tolerance set, data preset, inch/mm conversion, measuring direction set, max./min./range measurement, absolute/incremental measurement
- ◆ Data output(cable code:200-03 or 200-04)
- ◆ Automatic power off
- ◆ Supplied with flat and lug back



211-010-13I



Range: .5"

Resolution .00005"/0.001mm

| Code | Range | Accuracy | Hysteresis |
|-------------|------------|----------|------------|
| 211-010-03I | .5"/12.7mm | ±.00015" | .00005" |
| 211-025-03I | 1"/25.4mm | ±.00015" | .00005" |
| 211-050-03I | 2"/50.8mm | ±.00015" | .00005" |


Resolution .0005"/0.01mm

| Code | Range | Accuracy | Hysteresis |
|-------------|------------|----------|------------|
| 211-010-13I | .5"/12.7mm | ±.0015" | .0005" |
| 211-025-13I | 1"/25.4mm | ±.0015" | .0005" |
| 211-050-13I | 2"/50.8mm | ±.0015" | .0005" |


With manufacturer inspection certificate



Application

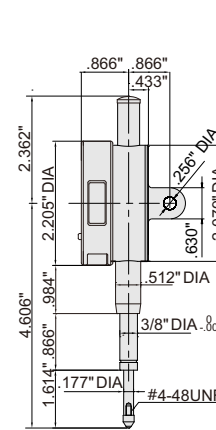

Range: 1"

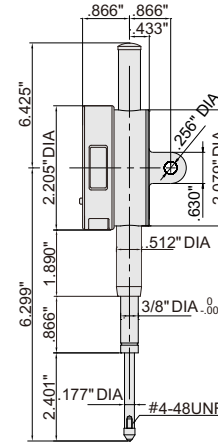

Range: 2"