




- ◆ Specially designed for bore gauges
- ◆ The minimum value tracking function can find the diameter automatically
- ◆ Read the diameter directly, after inputting the size of setting ring
- ◆ Reading in digit and analog
- ◆ Button: minimum value tracking, calibration, data preset, inch/metric conversion, absolute/incremental measurement
- ◆ Automatic power off
- ◆ Data output(cable code:200-03 or 200-04)



215-010-12I

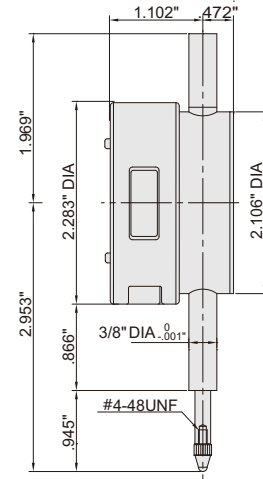

INDICATOR

Resolution .00005"/0.001mm

Code	Range	Accuracy(fges)	Hysteresis(fu)	Remark
215-010-02I	.5"/12.7mm	±.00015"	.00005"	flat back

Resolution .0001"/0.002mm

Code	Range	Accuracy(fges)	Hysteresis(fu)	Remark
215-010-12I	.5"/12.7mm	±.0015"	.0005"	flat back

With manufacturer inspection certificate

Application

