

SERIES 229

DIAL INDICATOR

- ◆ Graduation: 0.01mm
- ◆ With limit hands
- ◆ Rang per revolution: 1mm
- ◆ Supplied with lug and flat back


Styli (optional)



Application



Note: 229-100-21
can only be used vertically

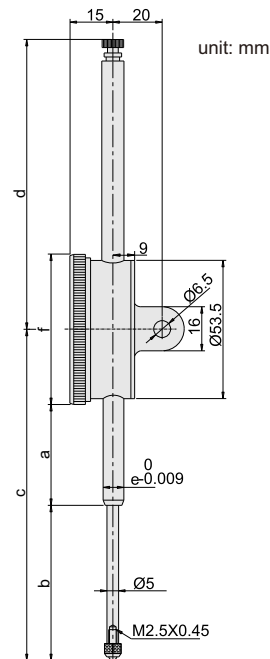

Code	Range	Accuracy	Hysteresis	Scale	a	b	c	d	e	f
229-050-21 *	50mm	40µm	8µm	0-100	40mm	58mm	127mm	108mm	Ø8mm	Ø58mm
229-100-21	100mm	50µm	9µm	0-100	60mm	108mm	207mm	168mm	Ø10mm	Ø78mm

* with calibration certificate