





- ◆ Jeweled bearing
- ◆ Carbide contact point
- ◆ Two measuring directions
- ◆ Anti magnetic body
- ◆ Supplied with two clamps: diameter  $\varnothing 4\text{mm}$  and  $\varnothing 8\text{mm}$
- ◆ Optional accessory: styli



Application



Clamps (included)

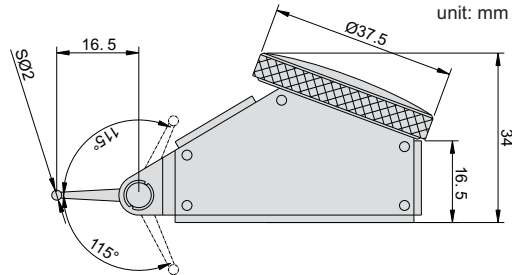

INDICATOR

Code	Range	Graduation	Accuracy(fges)	Hysteresis	Dial Reading
265-008-11	0.8mm	0.01mm	13 $\mu\text{m}$	3 $\mu\text{m}$	0-40-0