



Dial test indicator is not included

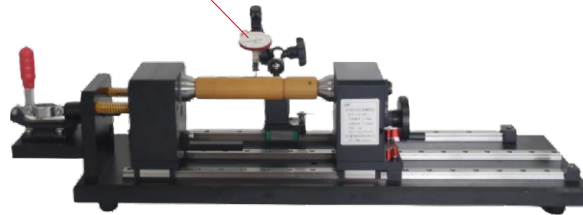

663-012-02

- ◆ Double guide
- ◆ Quick positioning, suitable for mass measurement
- ◆ Suitable for cylinders with outside diameter $\varnothing 3$ -180mm or inside diameter $\varnothing 1$ -40mm
- ◆ Supplied with standard rod to verify accuracy
- ◆ Optional accessories: dial test indicator (code: 261-002-01 or 261-002-02)

INDICATOR

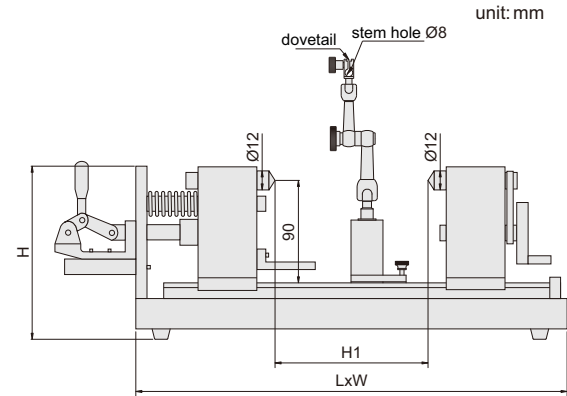

Code	Inside diameter	Outside diameter	Workpiece length (H1)	Accuracy	Center height (h)	LxWxH
663-006-02	$\varnothing 1$ -40mm	$\varnothing 3$ -180mm	150mm	2 μ m	90mm	390x150x150
663-012-02	$\varnothing 1$ -40mm	$\varnothing 3$ -180mm	300mm	2 μ m	90mm	540x150x150