
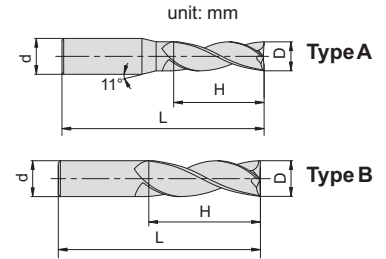


AN3E/Standard

Flat end milling cutter (aluminum alloy machining)

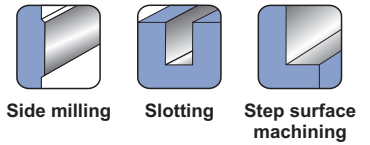

Standard length

Specification	D	d	H	L	Type
AN3E01003	1.0	4.0	3.0	50.0	A
AN3E015045	1.5	4.0	4.5	50.0	A
AN3E02006	2.0	4.0	6.0	50.0	A
AN3E02508	2.5	4.0	8.0	50.0	A
AN3E03009	3.0	4.0	9.0	50.0	A
AN3E03511	3.5	4.0	11.0	50.0	A
AN3E04012	4.0	4.0	12.0	50.0	B
AN3E05013	5.0	6.0	13.0	50.0	A
AN3E06015	6.0	6.0	15.0	50.0	B
AN3E08020	8.0	8.0	20.0	60.0	B
AN3E10025	10.0	10.0	25.0	75.0	B
AN3E12030	12.0	12.0	30.0	75.0	B
AN3E14040	14.0	14.0	40.0	100.0	B
AN3E16045	16.0	16.0	45.0	100.0	B
AN3E18045	18.0	18.0	45.0	100.0	B
AN3E20045	20.0	20.0	45.0	100.0	B

Workpiece material						
P	M	K	N	S		H
Steel <40HRC	Stainless steel <40HRC	Cast iron <40HRC	Non-ferrous metal	Heat-resistant alloy <40HRC	Titanium alloy <40HRC	High hardness steel
			●			


Application: ● Fitwell ○ Applicable

B

END MILLS

AN3E/Standard

Flat end milling cutter (aluminum alloy machining)

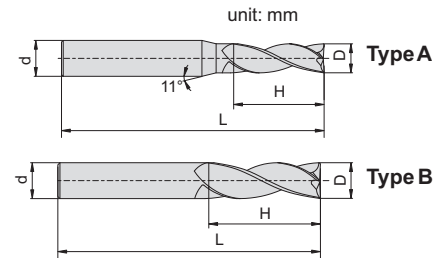

3 blade length

Specification	D	d	H	L	Type
AN3E03009-HL	3.0	6.0	9.0	50.0	A
AN3E04012-HL	4.0	6.0	12.0	50.0	A
AN3E05015-HL	5.0	6.0	15.0	50.0	A
AN3E06015-HL	6.0	6.0	15.0	50.0	B
AN3E08024-HL	8.0	8.0	24.0	60.0	B
AN3E10030-HL	10.0	10.0	30.0	75.0	B
AN3E12036-HL	12.0	12.0	36.0	75.0	B
AN3E16048-HL	16.0	16.0	48.0	100.0	B
AN3E20060-HL	20.0	20.0	60.0	120.0	B

Workpiece material						
P	M	K	N	S		H
Steel <40HRC	Stainless steel <40HRC	Cast iron <40HRC	Non-ferrous metal	Heat-resistant alloy <40HRC	Titanium alloy <40HRC	High hardness steel
			●			


Application: ● Fitwell ○ Applicable

B

END MILLS

AN3E/Standard

Flat end milling cutter (aluminum alloy machining)

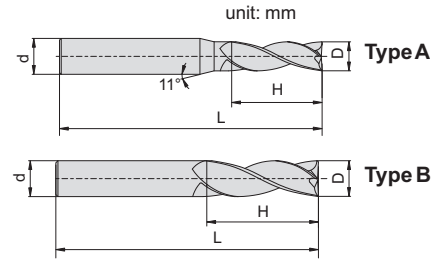

Straight shank extension

Specification	D	d	H	L	Type
AN3E03012-L1	3.0	6.0	12.0	75.0	A
AN3E04016-L1	4.0	6.0	16.0	75.0	A
AN3E05020-L1	5.0	6.0	20.0	75.0	A
AN3E06025-L1	6.0	6.0	25.0	75.0	B
AN3E08030-L1	8.0	8.0	30.0	75.0	A
AN3E08035-L2	8.0	8.0	35.0	100.0	B
AN3E10040-L2	10.0	10.0	40.0	100.0	B
AN3E12050-L2	12.0	12.0	50.0	100.0	B
AN3E16075-L3	16.0	16.0	75.0	150.0	B
AN3E20080-L3	20.0	20.0	80.0	150.0	B

Workpiece material						
P	M	K	N	S		H
Steel <40HRC	Stainless steel <40HRC	Cast iron <40HRC	Non-ferrous metal	Heat-resistant alloy <40HRC	Titanium alloy <40HRC	High hardness steel
			●			

Application: ● Fitwell ○ Applicable

B
END MILLS