


◆ Trinocular head is used to connect to camera

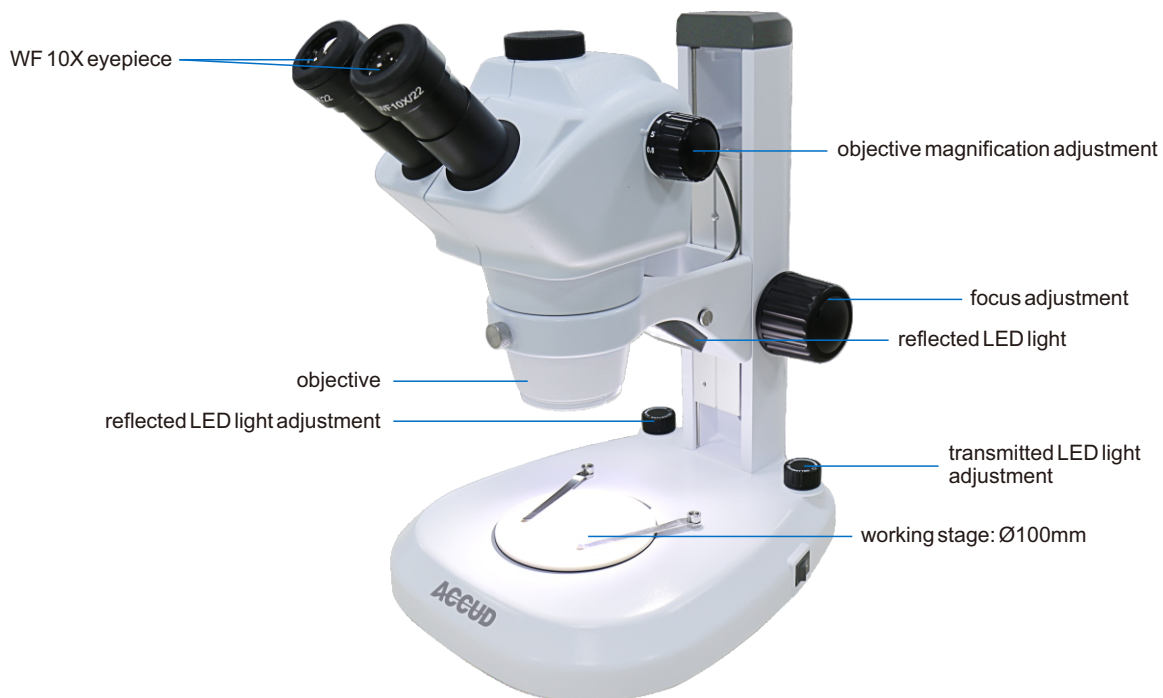

**ZS0850**

#### SPECIFICATION

| Code                  | ZS0850                                        | ZS0850T    |
|-----------------------|-----------------------------------------------|------------|
| Optical               | binocular                                     | trinocular |
| Eyepiece              | 10X (view field: Ø22mm)                       |            |
| Objective             | 0.8X ~ 5X (zoom)                              |            |
| Zoom ratio            | 1:6.3                                         |            |
| Pupil distance        | 55 ~ 75mm (adjustable)                        |            |
| Diopter adjustment    | ±5 diopter (two eyepieces)                    |            |
| Working distance      | 115mm                                         |            |
| Max. workpiece height | 75mm                                          |            |
| Illumination          | selectable incident and transmitted LED light |            |
| Poewr                 | 110/220V, 50/60HZ                             |            |
| Dimension(L×W×H)      | 290×260×480mm                                 |            |
| Weight                | 4.9kg                                         |            |

#### INCLUDED ACCESSORIES

|                                  |      |
|----------------------------------|------|
| Main unit                        | 1pc  |
| 10X eyepiece                     | 2pcs |
| Ø100mm frosted glass plate       | 1pc  |
| Ø100mm black/white plastic plate | 1pc  |
| Dustproof cover                  | 1pc  |

#### OPTIONAL ACCESSORIES

|                         |              |
|-------------------------|--------------|
| 0.5X Objective          | ZS1045-05-O  |
| 2X Objective            | ZS1045-02-O  |
| 10X Eyepiece with scale | ZS1045-10-FE |
| WF15X Eyepiece          | ZS1045-15-E  |
| WF20X Eyepiece          | ZS1045-20-E  |
| Camera                  | 1300KPA      |