


# SERIES 241

# DIGITAL PRECISION BORE GAUGE



Accud

- ◆ With min. value tracking function, get the diameter automatically
- ◆ Optional accessory: series 531 setting rings

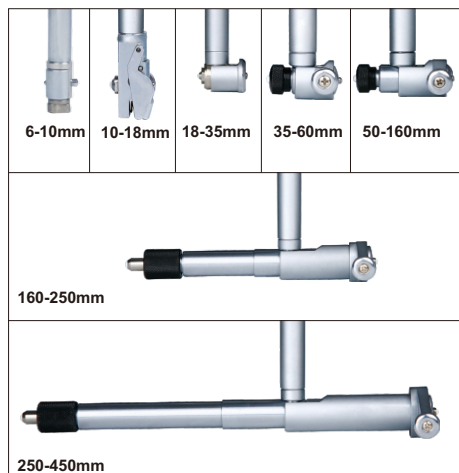


Bore gauge setter for setting zero(optional)

Setting ring(optional)




Measuring tips(included)


Gasket(included)

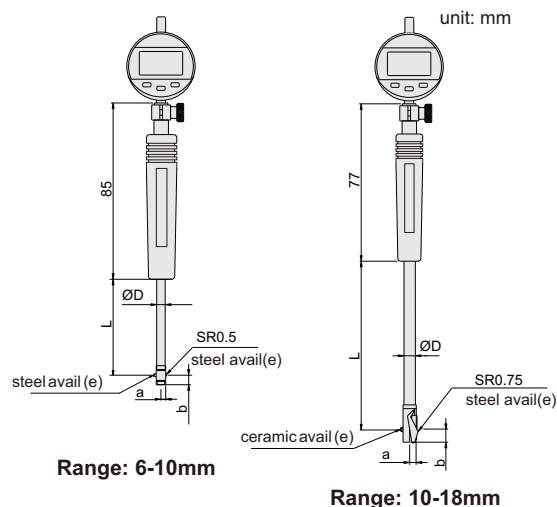

241-035-01

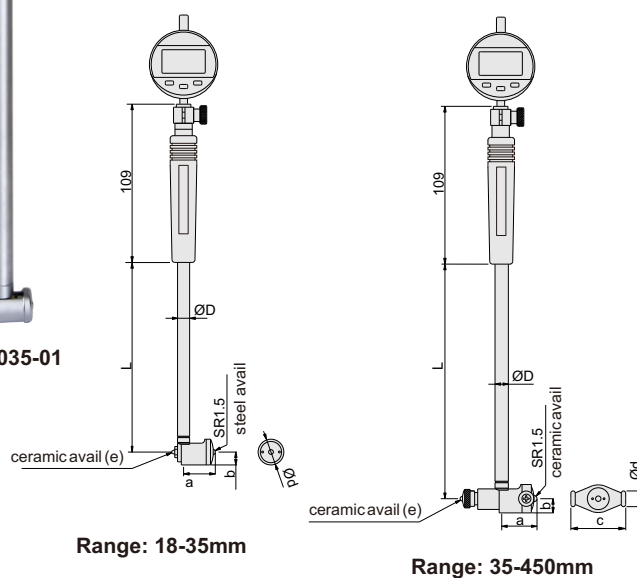

Install tips

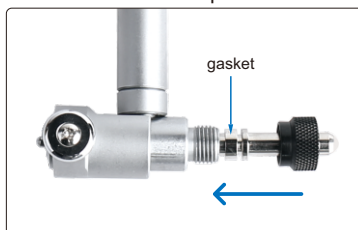

| Code       | Range     | Digital indicator                    | Tips  | Gasket | Accuracy | Repeatability | a    | b   | c     | Ød   | ØD   | e   | L   |
|------------|-----------|--------------------------------------|-------|--------|----------|---------------|------|-----|-------|------|------|-----|-----|
| 241-010-01 | 6-10mm    | Range: 12.7mm<br>resolution: 0.001mm | 9pcs  | 2pcs   | ±0.005mm | 2µm           | 3.6  | 5.7 | /     | /    | 4.5  | R1  | 48  |
| 241-018-01 | 10-18mm   |                                      | 9pcs  | 2pcs   | ±0.005mm | 2µm           | 5.6  | 7.8 | /     | /    | 6    | SR1 | 105 |
| 241-035-01 | 18-35mm   |                                      | 9pcs  | 2pcs   | ±0.006mm | 2µm           | 12.2 | 6.4 | /     | 12.7 | 9    | SR1 | 141 |
| 241-060-01 | 35-60mm   |                                      | 6pcs  | 4pcs   | ±0.007mm | 2µm           | 26   | 9   | 27    | 13   | 12.8 | SR2 | 141 |
| 241-100-01 | 50-100mm  |                                      | 11pcs | 4pcs   | ±0.007mm | 2µm           | 26   | 9   | 35    | 13   | 12.8 | SR2 | 141 |
| 241-160-01 | 50-160mm  |                                      | 12pcs | 4pcs   | ±0.007mm | 2µm           | 26   | 9   | 35    | 13   | 12.8 | SR2 | 141 |
| 241-160-02 | 100-160mm |                                      | 12pcs | 4pcs   | ±0.007mm | 2µm           | 26   | 9   | 35    | 13   | 12.8 | SR2 | 141 |
| 241-250-01 | 160-250mm |                                      | 5pcs  | 5pcs   | ±0.007mm | 2µm           | 56.5 | 13  | 74.5  | 15   | 14.5 | SR2 | 400 |
| 241-450-01 | 250-450mm |                                      | 5pcs  | 5pcs   | ±0.007mm | 2µm           | 86.5 | 15  | 101.5 | 15   | 14.5 | SR2 | 400 |

INSIDE/OUTSIDE  
MEASUREMENT