


SERIES 313

DIGITAL OUTSIDE MICROMETER




313-001-01

- ◆ IP65 protection level
- ◆ Button: on/off, mm/inch, set, zero
- ◆ Automatic power off
- ◆ Carbide measuring faces, ratchet stop
- ◆ Setting standards are included (except 313-001-01)

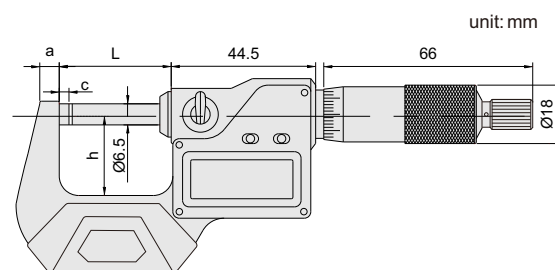

Setting standards (included)

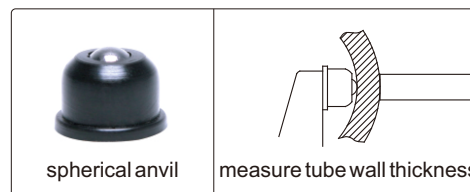

Code	Range	Resolution	Accuracy	a	c	h	L	Setting standards(included)
313-001-01*	0-25mm/0-1"	0.001mm/0.00005"	±2μm	6	3	25	34.5	-
313-002-01*	25-50mm/1-2"	0.001mm/0.00005"	±2μm	8	3	32	59.5	25mm
313-003-01*	50-75mm/2-3"	0.001mm/0.00005"	±3μm	8	3	44.5	84.5	50mm
313-004-01*	75-100mm/3-4"	0.001mm/0.00005"	±3μm	8	3	57	109.5	75mm
313-005-01	100-125mm/4-5"	0.001mm/0.00005"	±3μm	10	3	70	135	100mm
313-006-01	125-150mm/5-6"	0.001mm/0.00005"	±3μm	10	3	82	160.5	125mm
313-007-01	150-175mm/6-7"	0.001mm/0.00005"	±4μm	12	5.5	94.5	186	150mm
313-008-01	175-200mm/7-8"	0.001mm/0.00005"	±4μm	12	5.5	107	211.5	175mm
313-009-01	200-225mm/8-9"	0.001mm/0.00005"	±4μm	23	5.5	129.5	236	200mm
313-010-01	225-250mm/9-10"	0.001mm/0.00005"	±4μm	23	5.5	142.5	261.5	225mm
313-011-01	250-275mm/10-11"	0.001mm/0.0001"	±5μm	23	5.5	155	287	250mm
313-012-01	275-300mm/11-12"	0.001mm/0.0001"	±5μm	23	5.5	167.5	312.5	275mm

Set

Code	Range	Total QTY.	Included micrometers	Package
313-003-03*	0-75mm/0-3"	3pcs	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3"	blow mould case
313-004-04*	0-100mm/0-4"	4pcs	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3", 75-100mm/3-4"	blow mould case
313-006-06	0-150mm/0-6"	6pcs	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3", 75-100mm/3-4", 100-125mm/4-5", 125-150mm/5-6"	aluminum box

* With manufacturer inspection certificate